(19) Organisation Mondiale de la Propriété Intellectuelle Bureau international



(43) Date de la publication internationale 7 juillet 2005 (07.07.2005)

PCT

(10) Numéro de publication internationale **WO 2005/062038 A2**

(51) Classification internationale des brevets⁷: G01N 31/22

(21) Numéro de la demande internationale : PCT/FR2004/050697

(22) Date de dépôt international: 15 décembre 2004 (15.12.2004)

(25) Langue de dépôt :

français

(26) Langue de publication:

francais

(30) Données relatives à la priorité: 18 décembre 2003 (18.12.2003) 0314868

(71) Déposants (pour tous les États désignés sauf US) : UNI-VERSITE DE RENNES 1 [FR/FR]; 2, rue du Thabor, F-35042 Rennes Cedex (FR). ATMOSPHERE CONT-ROLE [FR/FR]; 4 et 6, rue des Entrepreneurs, Parc des Activités de la Grande Plaine, F-14760 Bretteville sur Odon (FR).

(72) Inventeurs; et

(75) Inventeurs/Déposants (pour US seulement): LAPINTE,

Claude [FR/FR]; 15, rue de la Touche Ablin, F-35510 Cesson-Sevigne (FR). ROUE, Séverine [FR/FR]; Neouet-Vian, F-29500 Ergue Gaberic (FR). IBN GHAZ-ALA, Safaa [MA/FR]; 80, Résidence Kerfleury, Rue Pablo Neruda, F-35760 Saint Gregoire (FR). ROUSSEL, Edmond [FR/FR]; La Picherie, F-14770 Danvou la Ferriere (FR). LEGRAND, Marc, Henri [FR/FR]; 9, rue Alphonse et Léonard Gille, F-14000 Caen (FR).

(74) Mandataire : Cabinet Herrburger; 115, boulevard Haussmann, F-75008 Paris (FR).


(81) États désignés (sauf indication contraire, pour tout titre de protection nationale disponible): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) États désignés (sauf indication contraire, pour tout titre de protection régionale disponible): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), eurasien (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Suite sur la page suivante]

(54) Title: REACTIVE OXYGEN DETECTING AND/OR ABSORBING COMPOUND, METHOD FOR PREPARING SAID COMPOUND AND A DEVICE COMPRISING IT

(54) Titre: COMPOSE REACTIF DETECTEUR ET/OU ABSORBEUR D'OXYGENE, PROCEDE DE PREPARATION D'UN TEL COMPOSE AINSI QUE DISPOSITIF RENFERMANT CELUI-CI

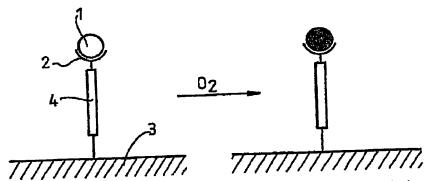

(57) Abstract: The inventive reactive oxygen detecting and/or absorbing compound is characterised in that it consists of a complex molecular metallic (1)/ ligand (2) derivatives which changes the colour thereof according to the oxydation degree of a metal and is connected to the surface of a solid support (3) by a covalent bond.

(57) Abrégé: Composé réactif détecteur et/ou absorbeur d'oxygène, caractérisé en ce qu'il est constitué par un complexe moléculaire dérivé métallique (1) /ligand (2) changeant de couleur en fonction du degré d'oxydation du métal et relié à la surface d'un support solide (3) par une liaison covalente.

Reactive oxygen-detecting and/or -absorbing compound, method for preparing a compound of this type and a device comprising this compound.

5 The present invention relates to a reactive compound which is capable of having two complementary functions, that is to say, on the one hand, detecting the presence of oxygen by means of a clear colour change which can be seen both with the naked eye and with a spectrophotometer and, on the other hand, chemically and irreversibly absorbing the oxygen contained in a closed chamber.

Systems for indicating oxygen have been extensively described in documentation; they generally use a colorant which changes shade in accordance with its level of oxidation associated with a reducing agent in order to maintain the reduced form of the colorant when no oxygen is present (documents DE-30 25 264, JP-62 183 834, WO-93/24820, WO-98/03866...).

15

30

20 The oxygen-indicating reagent may be in the form of ink (documents DE-30 25 264, JP-62 183 834), incorporated in a thermoplastic material (document WO-2003/00557), interposed between materials which are permeable to oxygen (document WO-93/24820) or incorporated in an amorphous medium (document FR-2 710 751).

Specialists have at the same time already proposed a wide range of oxygen-absorbing devices which are used within a number of technical fields, including, for example, food-processing industries, in particular for producing packagings which allow food products to be stored in an inert atmosphere, pharmaceutical industries, for the storage of preparations for medical use, or more generally in all fields which

require an atmosphere which is free from oxygen or which has a low content of oxygen.

These different systems have one disadvantage in common, which is connected with the fact that the indicating and/or absorbing reagent is susceptible to migration phenomena, which can be very disruptive, in particular in the context of applications which are connected with the food or pharmaceutical industry.

10

In this context, the object of the present invention is to provide a reactive oxygen-detecting and/or -absorbing compound in which the indicating reagent is connected in an irreversible manner to a solid support so that it does not risk being exposed to migration phenomena, and which can further be obtained from non-toxic products which are commercially available.

This reactive compound is characterised in that it is constituted by a molecular complex which comprises a metal derivative/ligand which changes colour in accordance with the extent of oxidation of the metal and which is connected to the surface of a solid support by means of a covalent bond.

- Owing to the fact that the active molecules of the reactive compound according to the invention are fixed to a support, thus constituting a hybrid material, they cannot migrate by means of contact into another substance.
- 30 According to the invention, the molecular complex is preferably connected to the surface of the support by means of a derivative of an organic linking chain.

A chain of this type comprises, on the one hand, a first function or grafting function which allows it to be fixed to the support and, on the other hand, a second function, or co-ordination function, which is suitable for bringing about coupling with an associated molecular condensation entity in order to form the ligand which allows the complexing of the metal derivative.

The appended drawing is a schematic illustration of the configuration of the reactive compound according to the invention and its colour change following a chemical reaction of the metal derivative which it contains with oxygen.

A reactive compound of this type is constituted by a complex which comprises a metal derivative 1/ligand 2 and which is connected to the surface of a support 3 by means of a derivative of an organic linking chain 4 which constitutes a branch which allows the functional portion 1, 2 of the reactive compound to be fixed to the support 3.

20

25

15

The reactive compound according to the invention is therefore constituted by an organic molecular complex which is sensitive to oxygen and which is fixed in a secure manner by means of covalent chemical bonds to the surface of a support which retains its mechanical properties but which takes on the colour of this complex, this colour being changed when it is exposed to an atmosphere which contains oxygen.

The rate of this colour change depends on the temperature and the partial pressure in terms of oxygen and the degree of humidity of the atmosphere in question.

Used alone or in combination with other oxygen-absorbing agents, this reactive compound allows the presence of oxygen to be detected and the oxygen present in a chamber to be absorbed.

5

According to the invention, the ligand may advantageously comprise a heteroatomic chain which may or may not be substituted and which comprises two conjugated imine functional groups and in which at least two atoms of nitrogen, one of which belongs to a pyridine core or the like, are separated by two atoms of carbon.

According to the invention, a core similar to a pyridine core may be, for example, a substituted pyridine core or a polycyclical system which contains at least one pyridine core.

According to a preferred feature of the invention, the coordination function of the organic linking chain is an amine function, in particular a primary amine function.

20

15

The molecular condensation entity may itself advantageously be constituted by 2-pyridine carboxaldehyde, 2-pyridine carboxylic acid or the chloride thereof.

25 According to this feature, the ligand is therefore constituted by a compound which results from the condensation of 2-pyridine carboxaldehyde, or 2-pyridine carboxylic acid or the chloride thereof, with the amine function of the organic linking chain.

30

A condensation of this type may lead to the formation of nitrogenous bidentate, tridentate or tetradentate ligands

which are capable of complexing a number of transition metals and their derivatives.

Complexes of this type may, in the presence of oxygen, take on an intense colour which is characteristic of the extent of oxidation of the metal.

According to the invention, the metal derivative must be selected in such a manner that, at the centre thereof, the metal has a low level of oxidation and is therefore capable of reacting with oxygen.

By way of example, this metal derivative may advantageously be selected from the group formed by CuCl, $[Cu(CH_3CN)_4]$ [PF₆], AgNO₃, and FeSO₄.

In the metal derivative $[Cu(CH_3CN)_4][PF_6]$, the counter-anion PF₆ may be replaced by any other weakly co-ordinating counter-anion, such as BF₄ or CF₃OSO₂.

20

15

10

According to a first variant of the invention, the support is an organic polymer support such as polystyrene balls or a copolymer based on polystyrene, and the grafting function of the organic linking chain is an alkene function.

25

30

By way of example, the reactions below constitute three examples for preparing ligands L1, L2, L3 based on organic linking chains which are commercially available and which comprise, on the one hand, an alkene function which allows them to be fixed to an organic polymer support by means of co-polymerisation and, on the other hand, a primary amine function which is capable of reacting by means of condensation with 2-pyridine carboxaldehyde or 2-pyridine carboxylic acid.

The molecular complexes which are obtained after the ligand has reacted with a derivative of a transition metal have a strip for intense metal/ligand absorption in the visible range. The colour of this strip is often characteristic of the extent of oxidation of the metal.

15

Furthermore, balls of functional polystyrene which have one or more primary amine functions and/or one or more secondary amine functions and which are commercially available may constitute a support which is simple to use.

According to a second variant of the invention, the support is a mineral support, such as balls of a mineral glass, and the grafting function of the organic linking chain is a trialkoxysilane function, in particular a trimethoxysilane function.

20 The support is preferably constituted by an activated metal oxide, such as TiO_2 , ZrO_2 or preferably SiO_2 or Al_2O_3 which constitute inexpensive oxides which are completely non-toxic

and which are also commercially available in a wide range of qualities.

A support of this type may advantageously be in the form of glass-like balls which may have different granulometries θ , by way of example, $60 < \theta < 200~\mu m$ or $200 < \theta < 500~\mu m$.

According to this variant of the invention, the organic linking chain may itself advantageously be selected from the group formed by 3-aminopropyltrimethoxysilane, N-[3-(trimethoxysilyl)propyl]ethylenediamine and 3-(2-(2-amino)ethylamino]propyl-trimethoxysilane.

The invention also relates to a method for preparing a 15 reactive compound of the type mentioned above which is connected to the surface of a mineral support.

According to the invention, a method of this type is characterised in that it comprises the following steps:

- 20 activating the support by means of immersion in an acid solution, washing operations, then air-drying,
 - grafting the organic linking chain to the activated support by means of immersion in ethanol at ambient temperature,
- synthesis of the ligand in situ by adding the molecular condensation entity to the organic chain previously grafted to the support which may or may not have been activated at ambient temperature and in an ethanol medium, and
- co-ordinating the metal derivative on the ligand or metallisation by means of immersion in a solution of ethanol at ambient temperature in an inert atmosphere.

It should be noted that the steps for grafting the organic linking chain to the activated support and for synthesis of the ligand in situ are inseparable and can be carried out in one sequence or the other, which means that the activated support can be introduced into the reaction medium before or after the molecular condensation entity.

The method according to the invention has the advantage of being able to be carried out in air, with the exception of the final step of metallisation which requires an inert atmosphere, although the reactive compound which is ultimately obtained is intended to react with oxygen.

In the embodiment in which the support is constituted by balls of silica and the organic chain by 3-aminopropyl trimethoxysilane, the grafting of the organic linking chain on the activated support and the synthesis of the ligand in situ may be illustrated as below:

20

25

10

The method according to the invention thus allows an Si-1 chain to be obtained which is grafted to the support, then, after addition of 2-pyridine carboxaldehyde and agitation using an ultrasound bath (sonication), an Si-2 compound to be obtained which is constituted by the ligand which is grafted

to the activated support by means of a derivative of the organic chain.

In the case of a metal derivative ML_{n} , the final step of metallisation may itself be illustrated as below:

The Si-3 and Si-4 compounds illustrated below correspond to other examples of structures of grafted complexes according to the invention which are obtained from organic chains which are constituted by N-[3-(trimethoxysilyl)propyl]-ethylenediamine or 3-[2-(2-amino)ethylamino]propyl-trimethoxysilane.

15

10

The various steps of the method according to the invention will be illustrated in greater detail by the following examples:

Example 1: Activation of the support

50g (0.238 mole) of ammonium persulfate are gradually introduced into an Erlenmeyer flask containing one litre of 10N sulphuric acid, with magnetic agitation. After cooling to 20°C, this solution is poured into a beaker containing 250g of silica. After homogenisation, the silica is allowed to immerse for one hour. After Buechner filtration, the silica is rinsed 5 times with 100 ml of water and then 5 times with 100 ml of distilled water.

10

20

25

The silica which has been activated in this manner is dried in a vacuum at $20\,^{\circ}\text{C}$ for a minimum of 30 minutes, then at $120\,^{\circ}\text{C}$ in an oven for a minimum of three hours.

15 Example 2: Grafting reaction: preparation of Si-2

In a beaker, 3-aminopropyltrimethoxysilane (186.5 μ l, 1 mmole) is dissolved in an excess of ethanol (30 ml), then 1g of activated fine silica is introduced directly into the reaction medium. The solution is left to rest at 20°C for one hour. An equivalent of 2-pyridine carboxaldehyde (96.5 μ l, 1 mmole) is then added to the solution and the reaction admixture is agitated using an ultrasound bath for 30 minutes.

Finally, the support is recovered by means of Buechner filtration and rinsed in ethanol (3 times 20 ml) then in ether (3 times 20 ml). The grafted silica is allowed to dry in a vacuum for 15 minutes at 20°C. Graft ratio: 0.82 mmole/g.

Example 3: Grafting reaction: preparation of Si-2

30 In a beaker, 2-pyridine carboxaldehyde (96.5 μ l, 1 mmole) is dissolved in ethanol (30 ml), then an equivalent of 3-amino-5-pyridinetrimethoxysilane (136.5 μ l, 1 mmole) is added to the solution and the reaction admixture is left in a state of

agitation for 30 minutes. The support is then introduced directly into the reaction medium. Two techniques are then used:

- \Rightarrow either the mixture is left to rest for 18 hours at 20°C (immersion method),
- \Rightarrow or the mixture is agitated using an ultrasound bath for 30 minutes at 20°C.

After grafting, the support is filtered, rinsed in ethanol, (3 times 20 ml) then in ether (3 times 20 ml). It is finally dried in the open air for 30 minutes. It should be noted that the balls which are initially white take on a yellowish colour after grafting, which is characteristic of imine. Graft ratio: 0.79 mmole/g.

15

Example 4: Metallisation reaction of Si-2

In a Schlenck tube, at 20°C, the grafted ligand (1 g) is suspended in deaerated ethanol (30 ml), then CuCl (99 mg, 1 mmole) is introduced with a current of argon. The admixture is kept in a state of magnetic agitation for 15 minutes. After filtering and washing in ethanol, (3 times 10 ml), the support is isolated and dried in a vacuum (2h 30 min, 20°C) then conditioned in an inert atmosphere. Metallisation ratio: 0.76 mmole/g.

25

30

20

Example 5: Metallisation reaction of Si-2

In a Schlenck tube, at 20°C, the grafted ligand (0.200 g) is suspended in deaerated ethanol (10 ml), then $[Cu(CH_3CN)_4][PF_6]$ (0.074 g, 0.2 mmole) is introduced with a current of argon. The admixture is kept in a state of magnetic agitation for 15 minutes. After filtering and washing in ethanol, (3 times 10 ml), the support is isolated and dried in a vacuum (2h 30 min, 20°C) then conditioned in an inert atmosphere. Metallisation ratio: 0.80 mmole/g.

Example 6: Metallisation reaction of Si-2

In a Schlenck tube, at 20°C, the grafted ligand (0.200 g) is suspended in an admixture of water/deaerated ethanol (50:50, 20 ml), then FeSo₄ (0.056g, 0.2 mmole) is introduced with a current of argon. The admixture is kept in a state of magnetic agitation for 15 minutes. After filtering and washing in ethanol (3 times 20 ml), the support is isolated and dried in a vacuum (2h 30 min, 20°C) then conditioned in an inert atmosphere. Metallisation ratio: undetermined.

10

Example 7: Metallisation reaction of Si-2

In a Schlenck tube, at 20°C, the grafted ligand (0.200 g) is suspended in deaerated ethanol (20 ml), then AgNO₃ (0.339g, 0.2 mmole) is introduced with a current of argon. The admixture is kept in a state of magnetic agitation for 15 minutes. After filtering and washing in ethanol (3 times 20 ml), the support is isolated and dried in a vacuum (2h 30 min, 20°C), then conditioned in an inert atmosphere. Metallisation ratio: undetermined.

20

25

30

15

Example 8: Grafting reaction: preparation of Si-3

In a beaker, at ambient temperature, 1.85 ml of N-(3-(trimethylsilyl)-propyl)ethylenediamine is dissolved in an excess of ethanol (approximately 150 ml) then 10g of silica activated with the admixture are left to rest for one hour. 1 ml of 2-pyridine carboxylaldehyde is added to the solution and the reaction admixture is agitated using an ultrasound bath for 30 minutes. Finally, the support is isolated by means of Buechner filtration and rinsed in ethanol (3 times 20 ml), then in ether (3 times 20 ml). The grafted silica is dried in a vacuum for 15 minutes at 20°C. Graft ratio: 0.65 mmole/g.

Example 9: Grafting reaction: preparation of Si-4

1.85 ml of 3-[2-(2-aminoethylamino)ethylamino]propyl-trimethoxysilane, 150 ml of ethanol and 10g of activated silica are successively introduced into a beaker at 20°C. The admixture is left to rest for one hour. 1 ml of 2-pyridine carboxylaldehyde is then added to the solution and the reaction admixture is agitated using an ultrasound bath for 30 minutes. Finally, the support is recovered by means of Buechner filtration and rinsed in ethanol (3 times 20 ml), then in ether (3 times 20 ml). The grafted silica is dried in a vacuum for 15 minutes at 20°C. Grafting ratio: 0.60 mmole/g.

Example 10: Metallisation reaction of Si-3

10

20

25

30

In a Schlenck tube, at 20°C, the grafted ligand (1g) is suspended in deaerated ethanol (30 ml), then CuCl (0.100 g) is introduced with a current of argon. The admixture is kept in a state of magnetic agitation for 15 minutes. After filtering and washing in ethanol (3 times 10 ml), the support is isolated then dried in a vacuum (2h 30 min, 20°C). Metallisation ratio: 0.80 mmole/g.

Example 11: Metallisation reaction of Si-3

In a Schlenck tube, at 20°C, the grafted ligand (1 g) is suspended in deaerated acetone (10 ml), then 0.373 g of $[Cu(CH_3CN)_4][PF_6]$ are introduced with a current of argon. The admixture is kept in a state of magnetic agitation for 15 minutes. After filtering and washing in ethanol (3 times 10 ml), the support is isolated and dried in a vacuum (2h 30 min, 20°C). Metallisation ratio: 0.68 mmole/g.

Example 12: Metallisation reaction of Si-4

In a Schlenck tube, at $20\,^{\circ}\text{C}$, the grafted ligand (1 g) is suspended in deaerated ethanol (30 ml), then CuCl (0.100 g)

is introduced with a current of argon. The admixture is kept in a state of magnetic agitation for 15 minutes. After filtering and washing in ethanol (3 times 10 ml), the support is isolated and dried in a vacuum (2h 30 min, 20°C) then conditioned in an inert atmosphere. Metallisation ratio: 0.80 mmole/g.

Example 13: Metallisation reaction of Si-4

In a Schlenck tube, at 20°C, the grafted ligand (1 g) is suspended in deaerated acetone (10 ml), then 0.373 g of [Cu(CH₃CN)₄][PF₆] are introduced with a current of argon. The admixture is kept in a state of magnetic agitation for 15 minutes. After filtering and washing in ethanol (3 times 10 ml), the support is isolated and dried in a vacuum (2h 30 min, 20°C). Metallisation ratio: 0.70 mmole/g.

The present invention also relates to an oxygen-detecting and/or -absorbing device which comprises a reactive compound of the above-mentioned type.

20

A device of this type may have various configurations without thereby departing from the scope of the invention and may, for example, be constituted by a printing ink in which the reactive compound is incorporated; it is thus possible to obtain oxychromic inks which change colour in contact with oxygen.

Inks of this type are suitable for being used in particular in the context of marketing or education.

30

25

This device may also be in the form of agents for absorbing oxygen or for indicating the presence of oxygen in which the reactive compound may be bonded to a support by means of an

adhesive, or a binding agent having a controlled melting temperature (hot melt), or dispersed in a polymer then extruded, or integrated in a sachet, in porous systems or between films which are permeable to oxygen so as to be in the form of a label.

This device may also be in the form of packaging sheets which change colour when they are placed in contact with an atmosphere which contains gaseous oxygen.

10

CLAIMS

- Reactive oxygen-detecting and/or -absorbing compound, characterised in that
- it is constituted by a molecular complex which comprises a metal derivative (1)/ligand (2) and which changes colour in accordance with the extent of oxidation of the metal and which is connected to the surface of a solid support (3) by means of a covalent bond.

10

15

20

Reactive compound according to claim 1, characterised in that

the molecular complex is connected to the surface of the support by means of a derivative (4) of an organic linking chain which comprises, on the one hand, a first function or grafting function which allows it to be fixed to the support and, on the other hand, a second function, or co-ordination function, which is suitable for bringing about coupling with an associated molecular condensation entity in order to form the ligand which allows the complexing of the metal derivative.

- 3. Reactive compound according to claim 2, characterised in that
- the ligand comprises a heteroatomic chain which may or may not be substituted and which comprises two conjugated imine functional groups and in which at least two atoms of nitrogen, one of which belongs to a pyridine core or the like, are separated by two atoms of carbon.

30

4. Reactive compound according to claim 3, characterised in that

the co-ordination function of the organic linking chain is an amine function.

- 5. Reactive compound according to either claim 3 or claim 4, characterised in that the molecular condensation entity is constituted by 2-pyridine carboxaldehyde, or 2-pyridine carboxylic acid or the chloride thereof.
- 6. Reactive compound according to any one of claims 1 to 5, characterised in that the metal derivative is selected from the group formed by CuCl, [Cu(CH₃CN)₄] [PF₆], AgNO₃, and FeSO₄.
- 7. Reactive compound according to any one of claims 1 to 6, characterised in that the support is an organic polymer support such as polystyrene balls or a co-polymer based on polystyrene, and the grafting function of the organic linking chain is an alkene function.

20

25

8. Reactive compound according to claim 7, characterised in that the balls which constitute the support are balls of functional polystyrene which have one or more primary amine functions and/or one or more secondary amine functions.

9. Reactive compound according to any one of claims 1 to 6, characterised in that the support is a mineral support, such as balls of a mineral glass, and the grafting function of the organic linking chain is a trialkoxysilane function, in particular a trimethoxysilane function.

10. Reactive compound according to claim 9, characterised in that

the organic linking chain is selected from the group formed by 3-aminopropyltrimethoxysilane, N-[3-(trimethoxysily1)5 propyl]ethylenediamine and 3-(2-(2-amino)ethylamino]propyltrimethoxysilane.

- 11. Reactive compound according to either claim 9 or claim 10, characterised in that
- 10 the support is constituted by an activated metal oxide such as TiO_2 , ZrO_2 or preferably SiO_2 or Al_2O_3 .
 - 12. Method for preparing a reactive compound according to any one of claims 9 to 11, in which the support is a mineral support, characterised in that
 - it comprises the following steps:

15

20

25

- activating the support by means of immersion in an acid solution, washing operations, then air-drying,
- grafting the organic chain to the activated support by means of immersion in ethanol at ambient temperature,
 - synthesis of the ligand in situ by adding the molecular condensation entity to the organic chain previously grafted to the support which may or may not have been activated at ambient temperature and in an ethanol medium,
 - co-ordinating the metal derivative on the ligand by means of immersion in a solution of ethanol at ambient temperature in an inert atmosphere.
- 30 13. Oxygen-detecting and/or -absorbing device, characterised in that it comprises a reactive compound according to any one of claims 1 to 12.